
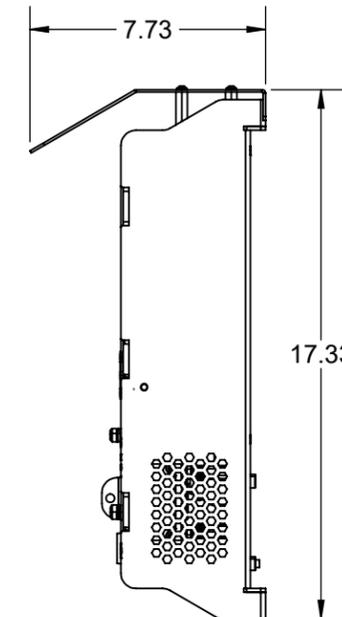
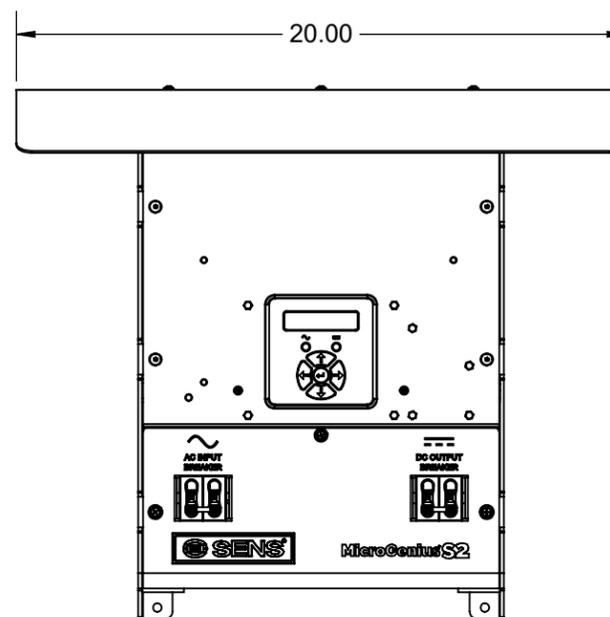
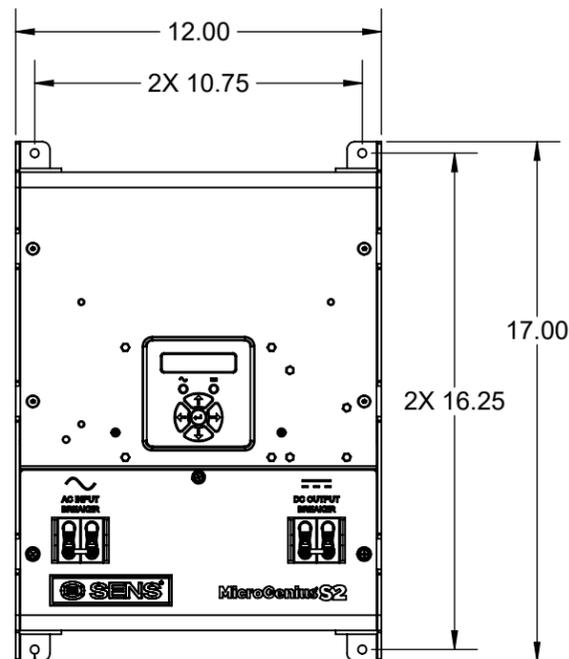


NOTES:


1. DRIP SHIELD IS OPTIONAL
2. THE INSTALLATION OF THIS EQUIPMENT SHALL COMPLY WITH ALL LOCAL AUTHORITY AND APPLICABLE BUILDING CODES
3. PROVIDE A MINIMUM CLEARANCE (FROM CHARGER CHASSIS) OF 6.0IN ON TOP, 4.0IN ON BOTTOM, AND 0.5IN ON SIDES OF UNIT FOR VENTILATION

DCN	REV.	DESCRIPTION	DATE	AUTHOR
107342	A	INITIAL RELEASE	9/8/2017	ERS
108575	B	ADDED BREAKERS	12/12/2024	AM

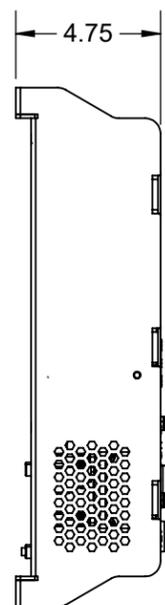

4X MOUNTING LOCATIONS FOR 1/4IN HARDWARE


THESE VIEWS SHOWN WITH OPTIONAL DRIP SHIELD

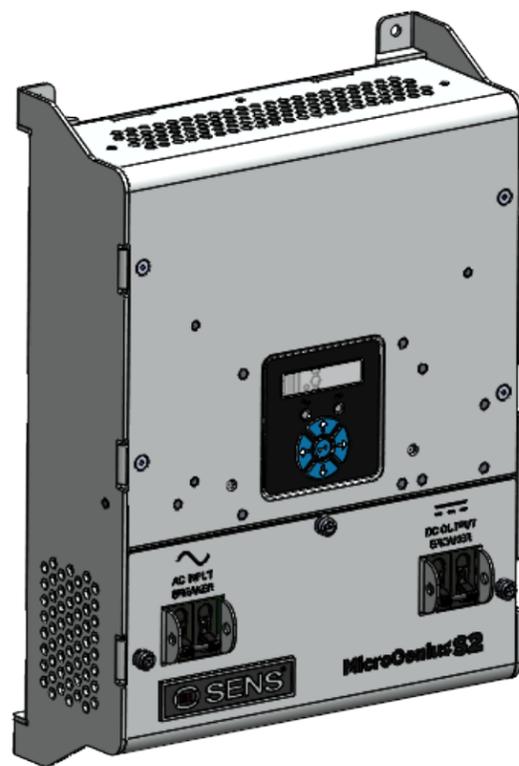

3/4 IN NPT CONDUIT OPENING FOR AC WIRING

3/4 IN NPT CONDUIT OPENING FOR COMMUNICATIONS WIRING

3/4 IN NPT CONDUIT OPENING FOR DC WIRING

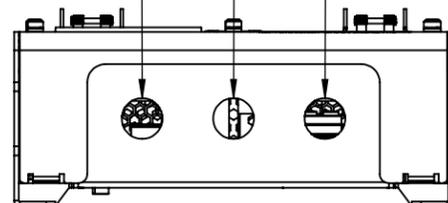

<p><b>SENS</b> STORED ENERGY SYSTEMS 1840 INDUSTRIAL CIRCLE LONGMONT, CO 80501 303-678-7500 WWW.SENS-USA.COM</p> <p>PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STORED ENERGY SYSTEMS, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STORED ENERGY SYSTEMS, LLC, IS PROHIBITED.</p>	UNLESS OTHERWISE SPECIFIED FOR ALL SHEETS: DIMENSIONS ARE IN INCHES. INCHES DO NOT SCALE DRAWING. DEFAULT TOLERANCES:	ORIGINAL AUTHOR: AMANZO	PART NUMBER: 2DCAD-S2-STD	REVISION: <b>B</b>
	X.XXX±0.010 X.XX±0.030 ANGLES±1.5° HOLES±.003	RELEASE DATE: 12/26/2024	DESCRIPTION: 2DCAD-S2-STD	SHEET: 1 OF 1
		SHEET FORMAT SIZE: B		
		THIRD ANGLE PROJECTION		